


HIGH PERFORMANCE MONOCRYSTALLINE PV MODULE



SKU: MTN-94051

144 CELL Mono PERC Module	550W Power Output Range
1500VDC Maximum System Voltage	21.5% Maximum Efficiency

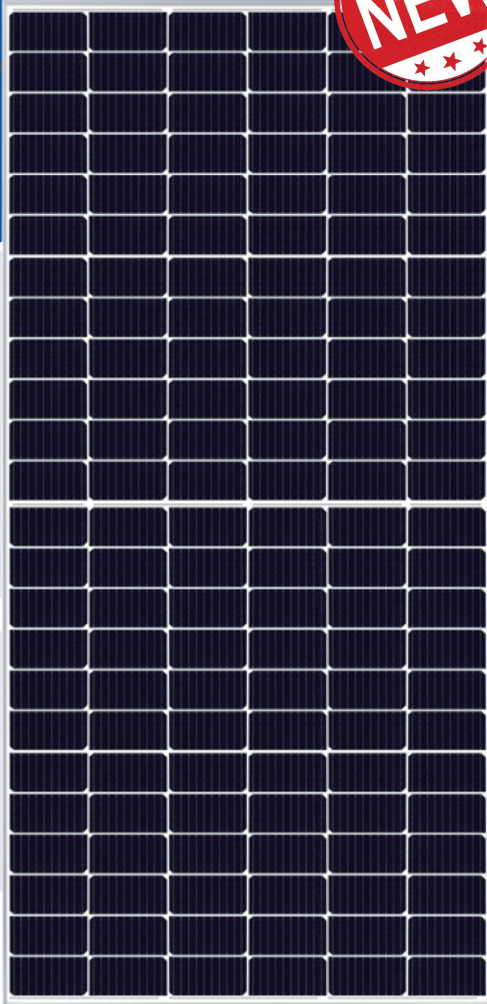


KEY SALIENT FEATURES

- Industry leading lowest thermal co-efficient of power
- Industry leading 12 years product warranty
- Excellent low irradiance performance
- Excellent PID resistance
- Positive tight power tolerance
- Dual stage 100% EL Inspection warranting defect-free product
- Module Imp binning radically reduces string mismatch losses
- Excellent wind load 2400Pa & snow load 5400Pa under certain installation method
- Comprehensive product and system certification
 - ◆ IEC61215:2016; IEC61730-1/-2:2016;
 - ◆ ISO 9001:2015 Quality Management System
 - ◆ ISO 14001:2015 Environmental Management System
 - ◆ ISO 45001:2018 Occupational Health and Safety Management System

LINEAR PERFORMANCE WARRANTY



12 year Product Warranty / 25 year Linear Power Warranty

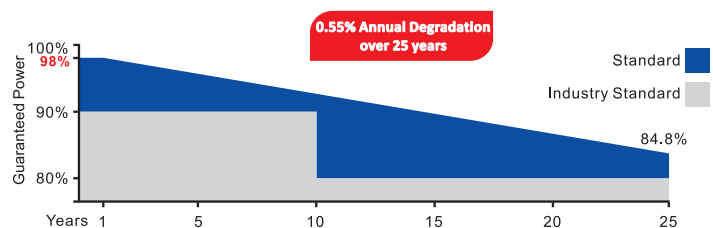

* As there are different certification requirements in different markets, please contact your local sales representative for the specific certificates applicable to the products in the region in which the products are to be used.

Dimensions of PV Module

Unit: mm

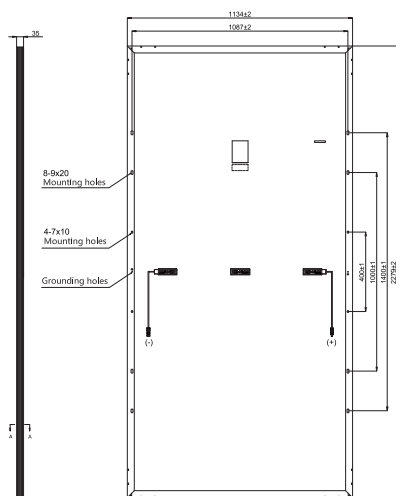

ELECTRICAL DATA (STC)

Model Number	MTN-94051
Rated Power in Watts-Pmax(Wp)	550
Open Circuit Voltage-Voc(V)	49.80
Short Circuit Current-Isc(A)	13.94
Maximum Power Voltage-Vmpp(V)	42.20
Maximum Power Current-Impp(A)	13.04
Module Efficiency (%) *	21.3

STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.
 * Module Efficiency (%): Round-off to the nearest number

ELECTRICAL DATA (NMOT)

Model Number	MTN-94051
Maximum Power-Pmax (Wp)	409.4
Open Circuit Voltage-Voc (V)	46.96
Short Circuit Current-Isc (A)	11.43
Maximum Power Voltage-Vmpp (V)	39.00
Maximum Power Current-Impp (A)	10.50

NMOT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1 m/s.

MECHANICAL DATA

Solar cells	Monocrystalline
Cell configuration	144 cells (6×12+6×12)
Module dimensions	2279×1134×35mm
Weight	27.8kg
Superstrate	High Transmission, Low Iron, Tempered ARC Glass
Substrate	White Back-sheet
Frame	Anodized Aluminium Alloy type 6005-2T6, Silver Color
J-Box	Potted, IP68, 1500VDC, 3 Schottky bypass diodes
Cables	4.0mm ² (12AWG), Positive(+)/350mm, Negative(-)/350mm (Connector Included)
Connector	Risen Twinsel PV-SY02, IP68

TEMPERATURE & MAXIMUM RATINGS

Nominal Module Operating Temperature (NMOT)	44°C±2°C
Temperature Coefficient of Voc	-0.275%/°C
Temperature Coefficient of Isc	0.045%/°C
Temperature Coefficient of Pmax	-0.35%/°C
Operational Temperature	-40°C~+85°C
Maximum System Voltage	1500VDC
Max Series Fuse Rating	25A
Limiting Reverse Current	25A

PACKAGING CONFIGURATION

	40ft(HQ)
Number of modules per container	620
Number of modules per pallet	31
Number of pallets per container	20
Packaging box dimensions (LxWxH) in mm	2325×1150×1250
Box gross weight[kg]	910

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.

