

# SMART RESIDENTIAL ESS SOLUTION

VE48100E




Most safety  $\text{LiFePO}_4$   
as cathode material



Long cyclic life-6000  
cycles(80%DOD)




Modular design  
Easy expandability



Self-designed BMS  
International  
design certification

# SPECIFICATION

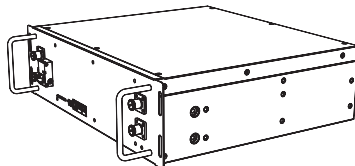Model	VE48100E
Schematic Diagram	
Cell Type	LFP
Nominal Energy	5.12kWh
Nominal Capacity	100Ah
Nominal Voltage	51.2V
Operating Voltage Range	42.0~57.6V
Nominal Charge Voltage	57.6V
Charge Current/Max.Continuous	100A
Discharge Cut-off Voltage	42.0V
Discharge Current/Max. Continuous	100A
Recommended Depth of Discharge	80% DOD
Operating Temp. Range/Charge	0°C~60°C
Operating Temp. Range/Discharge	-20°C~60°C
Dimension(W*H*D)	440*130*400mm
Weight	Approx. 41kg
IP Rating	IP20
Expansion	Max. 15 Units in Parallel
Communication	CAN/RS485
Cooling Mode	Natural Cooling
Cycle Life	6000 Cycles,80%DOD@25°C
Design Life	15+Years(25°C)
Installation	Floor/ Cabinet/ Rack Mounted
Allowed Humidity Range	≤95% RH
Protections	Over Charge/Over Discharge/Over Temperature/Over Current/Short Circuit etc.
Compatible Inverters	Deye/Solis/Hoymiles/Senergy/Afore/Megarevo/SRNE/Inhenergy etc.
Certifications	UN38.3/CE-EMC/IEC 62619/UL1973/Rohs

## Disclaimer:

This document may contain forecast information, including but not limited to future finances, operations, product series, new technologies, etc. Due to practice the uncertainty in the actual results may differ from the predicted information. Therefore, the information in this document is for reference only and does not constitute any offer or promise. Optonica Solar may modify the above information without notice.

